

## KD Wall Shelf



**Item #:** \_\_\_\_\_ **Qty #:** \_\_\_\_\_

**Model #:** \_\_\_\_\_

**Project #:** \_\_\_\_\_

### FEATURES:

Furnished with a 1-5/8" Bullnose edge with a 1-1/4" turn-up edge on sides and rear.

Unit is easily assembled employing the slip-fit TAB-LOK design.

### CONSTRUCTION:

Shelf and brackets are die stamped and die formed.

### MATERIAL:

**WS-KD Series** - 18 gauge stainless steel polished to a satin finish.

**AWS-KD Series** - Heavy gauge aluminum.

S/S	ALUMINUM	length
WS-KD-24	AWS-KD-24	24"
WS-KD-36	AWS-KD-36	36"
WS-KD-48	AWS-KD-48	48"
WS-KD-60	AWS-KD-60	60"

## Standard Wall Shelf

### FEATURES:

Brackets can be positioned to accommodate wall studs.

Furnished with a 1-5/8" Bullnose edge with a 1-1/2" turn-up edge at rear. Ends are turned down square.

### CONSTRUCTION:

Secured to wall by means of bolts through support brackets.

Units 7 ft. and larger are furnished with 3 brackets.

### MATERIAL:

**16 Gauge Series** - 304 stainless steel polished to a satin finish.

**18 Gauge Series** - 430 stainless steel polished to a satin finish.



10" Wide		12" Wide		15" Wide		18" Wide		Approx. Wt.	Approx. Cubes
16 Ga.	18 Ga.	16 Ga.	18 Ga.	16 Ga.	18 Ga.	16 Ga.	18 Ga.		
WS-10-24-16	WS-10-24	WS-12-24-16	WS-12-24	WS-15-24-16	WS-15-24	WS-18-24-16	WS-18-24	10 lbs.	3
WS-10-36-16	WS-10-36	WS-12-36-16	WS-12-36	WS-15-36-16	WS-15-36	WS-18-36-16	WS-18-36	12 lbs.	4
WS-10-48-16	WS-10-48	WS-12-48-16	WS-12-48	WS-15-48-16	WS-15-48	WS-18-48-16	WS-18-48	14 lbs.	5
WS-10-60-16	WS-10-60	WS-12-60-16	WS-12-60	WS-15-60-16	WS-15-60	WS-18-60-16	WS-18-60	17 lbs.	6
WS-10-72-16	WS-10-72	WS-12-72-16	WS-12-72	WS-15-72-16	WS-15-72	WS-18-72-16	WS-18-72	19 lbs.	7
WS-10-84-16	WS-10-84	WS-12-84-16	WS-12-84	WS-15-84-16	WS-15-84	WS-18-84-16	WS-18-84	22 lbs.	8
WS-10-96-16	WS-10-96	WS-12-96-16	WS-12-96	WS-15-96-16	WS-15-96	WS-18-96-16	WS-18-96	26 lbs.	10
WS-10-108-16	WS-10-108	WS-12-108-16	WS-12-108	WS-15-108-16	WS-15-108	WS-18-108-16	WS-18-108	28 lbs.	11
WS-10-120-16	WS-10-120	WS-12-120-16	WS-12-120	WS-15-120-16	WS-15-120	WS-18-120-16	WS-18-120	31 lbs.	12
WS-10-132-16	WS-10-132	WS-12-132-16	WS-12-132	WS-15-132-16	WS-15-132	WS-18-132-16	WS-18-132	35 lbs.	13
WS-10-144-16	WS-10-144	WS-12-144-16	WS-12-144	WS-15-144-16	WS-15-144	WS-18-144-16	WS-18-144	38 lbs.	14


Length = 24" to 144" in 12" increments.

# DETAILS and SPECIFICATIONS


TOL  $\pm .500''$

ALL DIMENSIONS ARE TYPICAL


## KD WALL SHELF

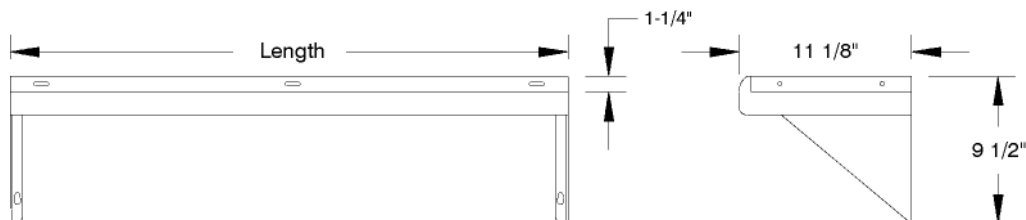

## STANDARD WALL SHELF

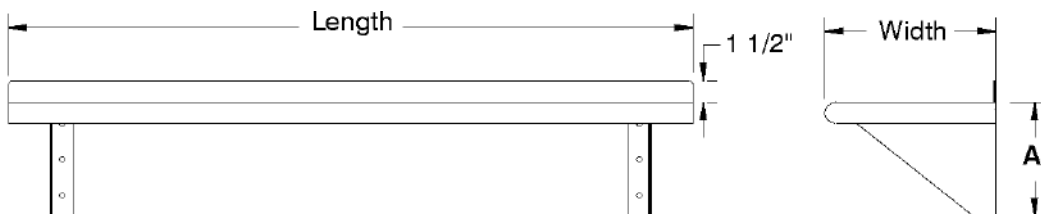

Width	A
10"	8"
12"	10"
15"	10"
18"	10"



### Requirements for NSF Installations

1. Install at least 60" above floor.
2. Limit to dry storage.
3. Avoid contact with liquids.
4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.

